

# G1Single™

CYLINDER RECOVERY




## Automatic Liquid and Vapor Recovery

**Ideal for Residential and Appliance Recovery**



**Permanently-Lubricated Refrigerant-Isolated Crankcase**

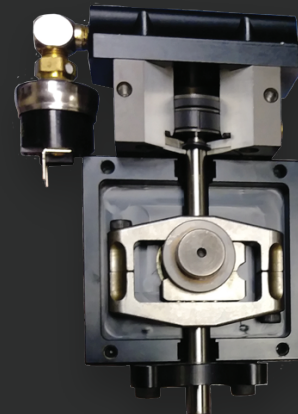

Having a refrigerant-isolated crankcase allows the G1Single to handle the force of liquid without issue. It is specifically designed for liquid first recovery.


**A2L**  
Compatible  
\*All Appion HVAC Tools

Pair with the **SPEEDKIT-R**  
For Maximum Speed



# Economical Liquid and Vapor Recovery

The G1Single is designed for hands-free liquid recovery with no valve operation. It is built with a high-efficiency motor, a single cylinder compressor, and massive air-flow, allowing for fast and simple refrigerant recovery and cooling efficiency.

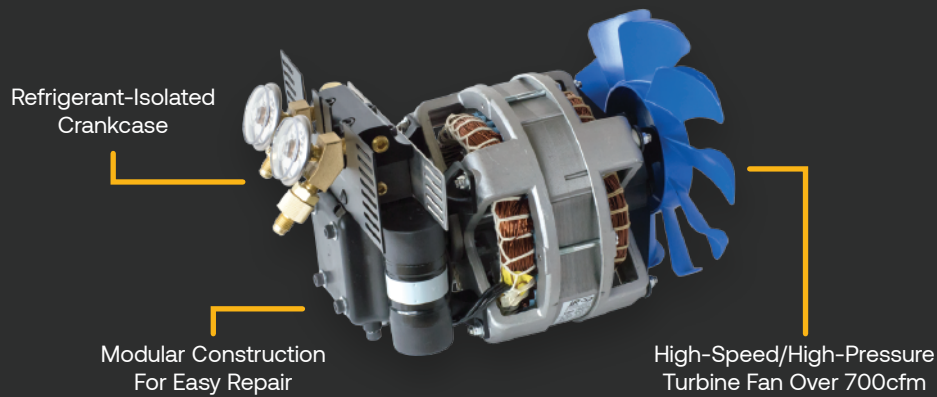

- ▶ Easy to use, ideal for residential and appliance recovery jobs
- ▶ **Permanently-lubricated, bearing-lined crankcase** is isolated from refrigerant, eliminating bearing contamination

- ▶ No purge cycle required
- ▶ 7-inch, 10-blade turbine fan blasts over **700 cfm of cooling air**

### G1Single Product Specifications

<b>Dims</b>	11.38 in x 10.30 in x 9.40 in 289 mm x 262 mm x 239 mm
<b>Weight</b>	22 lbs 10 kg
<b>Power</b>	115 VAC, 60 Hz, 10 Amps Int'l: 230 VAC, 50 Hz, 5 Amps



SCAN TO LEARN MORE

### G1Single Recovery Rates (per min)

Refrigerant	Push / Pull	Liquid	Vapor
<b>R-134A</b>	9.43 lb* 4.28 kg*	5.20 lb* 2.36 kg*	0.22 lb** 0.10 kg**
<b>R-22</b>	10.80 lb 4.90 kg	8.55 lb 3.88 kg	0.26 lb 0.12 kg
<b>R-407C</b>	11.33 lb 5.14 kg	5.84 lb 2.65 kg	0.31 lb 0.14 kg
<b>R-410A</b>	12.17 lb 5.52 kg	4.32 lb 1.96 kg	0.26 lb 0.12 kg

\*Using high speed direct liquid procedure

\*\*Vapor rate obtained using the optional cooling coil accessory  
Tested by a third party independent lab using the SpeedKit-R