

## WIRELESS LODGE WATCH FOR LINE VOLTAGE

This versatile 24V Lead/Lag Controller offers balanced operating time between 2 redundant devices. Status LEDs indicate the controller is powered and which piece of equipment is currently being energized. The iO-LL can be used on HVAC equipment, industrial equipment, heating equipment, cooling equipment, fans, pumps and motors.





### Features and Benefits:

- Locks out mini-split outdoor unit when transmitters detect an open door or window
- Restores power to mini-split outdoor unit when transmitters detect doors and windows are closed
- Greatly reduces wasted energy in vacation rentals
- Contributes to extends equipment life

### Warranty:

- 5 Years



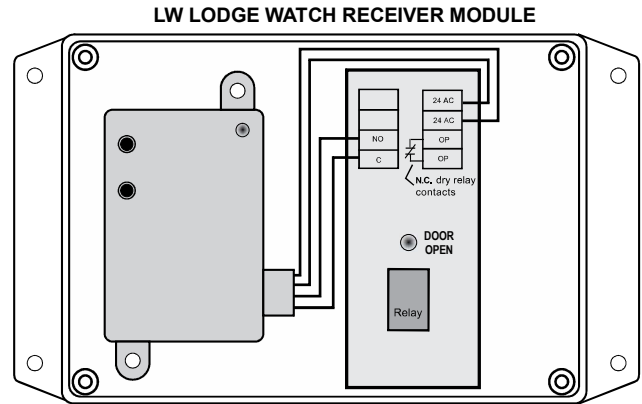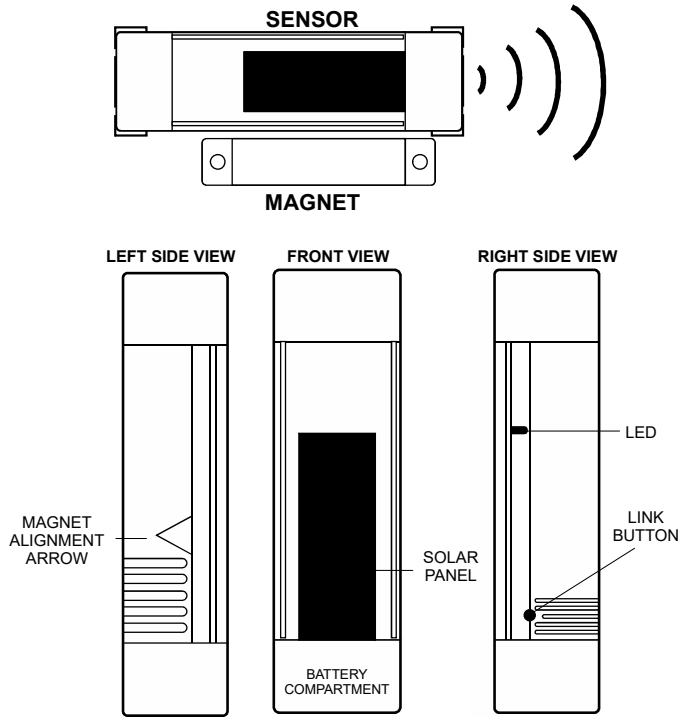

## Receiver Module Specifications:

<b>Enclosure Material:</b>	ABS with gasket seal and conduit knockouts for outdoor use
Dimensions:	6.00" Height x 10.00" Width x 3.00" Depth
Input Voltage:	24VAC
Receive Frequency:	902 MHz
<b>Relay Receiver:</b>	SPDT Continuous Duty Coil
LED Indication:	Red Status - Learn Mode
<b>Interface Board:</b>	SPDT Continuous Duty Coil
LED Indication:	Green door/window open
<b>Contactors:</b>	SPDT
Line Voltage:	240/277 VAC
Contact Rating:	40 Amps
Coil Voltage:	24 VAC

## Door/Window Transmitter Specifications:

<b>Application:</b>	Indoor use only
<b>Dimensions:</b>	3.15" Height x 1.3" Width x .60" Depth (combined)
<b>Transmitter Power:</b>	Solar with CR1216 Battery Backup
<b>Transmission Range:</b>	80 ft.
<b>Send Frequency:</b>	902 MHz
<b>Compliance:</b>	FCC, IC



5351 East Thompson Road Suite 142  
 Indianapolis, IN 46237  
 P: 888.359.0362  
 F: 317.489.5204

info@iOhvaccontrols.com  
 www.iOhvaccontrols.com