



### PRODUCT FEATURES

- 275 Lumen white Cree LED
- 2 x 0.19in red LEDs for night vision - on and flashing
- USB rechargeable high power lithium battery
- Red-to-Green charging indicator
- IPX5 water resistant
- 45° rotational head
- Fully adjustable non-slip silicone headband
- Easy push micro switch
- 3M VHB adhesive helmet mount included
- Comes with a handy drawstring storage/carry pouch

**BATTERY** - 3.7v 1800 mAh lithium-polymer rechargeable battery


**DIMENSIONS** - 2.4 x 1.5 x 1.6 in

**WEIGHT** - 2.7oz (including battery)

### RECHARGING

1. Only use a 5V 1A USB-C cable (important max 1A)
2. Lift the charging port cover on the side of the headtorch.
3. Plug the USB-C end of the cable into the charge port.
4. Plug the USB-A end of the cable into a USB charging port (do not exceed 5V 1A charging input or damage may occur).
5. Red LED flashing indicates charging, green LED indicates fully charged.
6. Charge Time: 2<sup>1/2</sup> hrs

*\*\*Warranty void if not used with specified cable and charging input\*\**

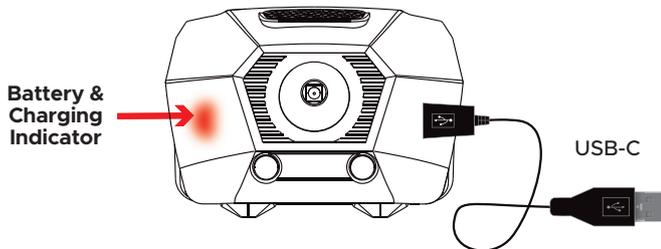

#### Battery Indicator

- Red = Less than 30% remaining
- Green = Up to 30% battery

#### Charging Indicator

- Red Flash = Charging
- Green = Fully Charged

### ANSI FL1 Standard



Mode	Lumen	Beam Distance	Runtime
WHITE HIGH	275	311ft	6 <sup>1/2</sup> H
WHITE - MED	75	150ft	13H
WHITE - LOW	9	49ft	77H
RED - HIGH	4	-	60H
RED - 2Hz FLASH	4	-	170H
RED - SOS	4	-	90H


### OPERATING INSTRUCTIONS

White Modes: High > Medium > Low > Off

Red Modes: Red > Red Flash > Red SOS > Off

**WHEN 'ON' IN EITHER WHITE OR RED MODE, PRESS AND HOLD SWITCH TO CHANGE TO THE OTHER MODE.**

*[If left in any mode for over 3 seconds, the next press will turn off]*

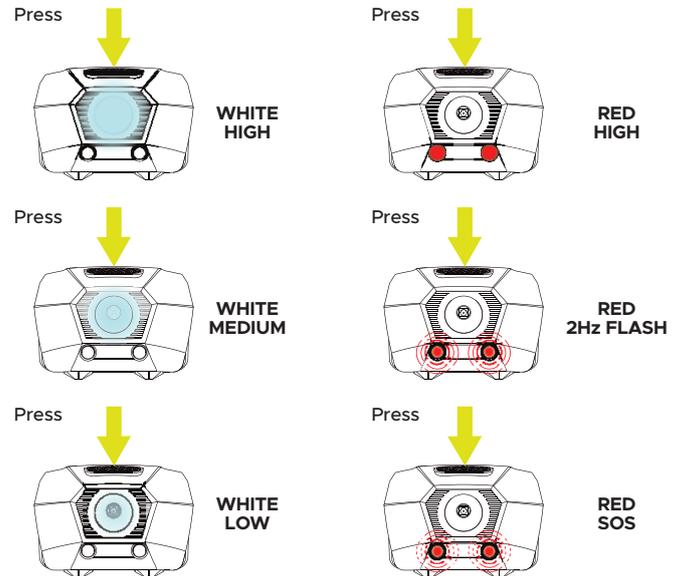

### ADVICE & IMPORTANT INFORMATION!

- Do not look directly at LEDs. Do not operate in intense sunlight or extreme temperature conditions (below 14°F or above 104°F).
- LEDs will become warm/hot when switched on; do not touch and never place LEDs face down on any surface – risk of fire!
- Do not use the device if there is any visible damage to the housing, charge port, switch or cable. Take care when using a USB plug adaptor, check for any damage. DO NOT exceed 5V 1A charging input or damage may occur to the rechargeable battery.
- The rechargeable battery will reach full performance after a few complete charging and discharging cycles.
- To keep the rechargeable battery in optimum condition, it should be recharged every 3-6 months, especially if it is not being used for a long period of time. Always fully charge rechargeable batteries before storage.
- Always protect batteries from heat, intense sunlight, fire, water and moisture – danger of explosion!
- If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if battery fluid comes into contact with the eyes.
- Children under 12 years of age should only use the product under adult supervision.
- Do not open, disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty.
- Take care not to let lenses come into contact with hard/sharp objects, damage/scratches to lenses will affect light output.
- This product is water resistant to IPX5 – DO NOT SUBMERGE. If the product has been subjected to excessive moisture/water the warranty may be void.
- This product has a 1 year standard warranty (or extended 2 years once registered online at [WWW.UNILITE.CO.UK/WARRANTY](http://WWW.UNILITE.CO.UK/WARRANTY)) against manufacturing faults and defects. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover battery leaks or the use of incorrect chargers and cables that can damage rechargeable batteries.
- Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please re-use or recycle packaging where possible.
- Keep these instructions for future reference or for subsequent possessors.